
## W A L K E R Z A N G E R

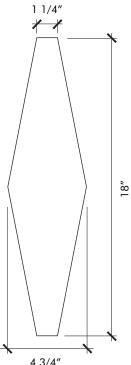

4 3/4"					
Usage		Calacata	Steel Grey		
	Commercial Floor	$\checkmark$	$\checkmark$		
	Commercial Interior & Exterior Wall	$\checkmark$	interior only		
	Pool & Spa	$\checkmark$			
(FZ)	Residential Bathroom Floor	$\checkmark$	$\checkmark$		
	Residential Interior & Exterior Wall & Floor	$\checkmark$	interior only		
	Shower Floor	$\checkmark$			
(	Shower Wall	$\checkmark$			
	Steam Shower Wall	wall only			

Material	Stone			
Finish	Honed			
Thickness	3/8″			
Cut and Fill Size	18″ x 211/16″			
Square Feet/Piece	0.3750			
Mounting	Loose			
Available Colors				
Calacata (Calacata) Steel Grey (Blue Travertine)				

Material Data		Calacata	Steel Grey			
	Color Variation		$\checkmark$			
	Color Variation	$\checkmark$				
Grout and Sealing						
<b>F</b>	Sealing Required	$\checkmark$	$\checkmark$			
	Grout with white thinset	$\checkmark$				
Cleaning and Maintenance						
Cr.	Protect from harsh abrasive cleaners and tools Recommended: Oceancare or Dry Treat products					

## Notes:

<sup>•</sup> We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.

