

<b>Material</b>	Stone
<b>Finish</b>	Antique
<b>Thickness</b>	3/8"
<b>Cut and Fill Size</b>	12" x 12"
<b>Square Feet/Piece</b>	1.00
<b>Mounting</b>	Loose
<b>Available Colors</b> Blanc	

Usage	
	Commercial Exterior Wall
	Commercial Interior Wall
	Residential Interior Floor
	Residential Exterior Wall
	Residential Interior Wall
	Fireplace Surround
	Shower Wall



Material Data	
	V4 Color Variation
	Frost Resistant

Sealing	
	Sealing is required prior to grouting

Cleaning and Maintenance	
	Use non-abrasive cleaner and a soft sponge

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiquated stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.
- 3" Dots are sold separately.

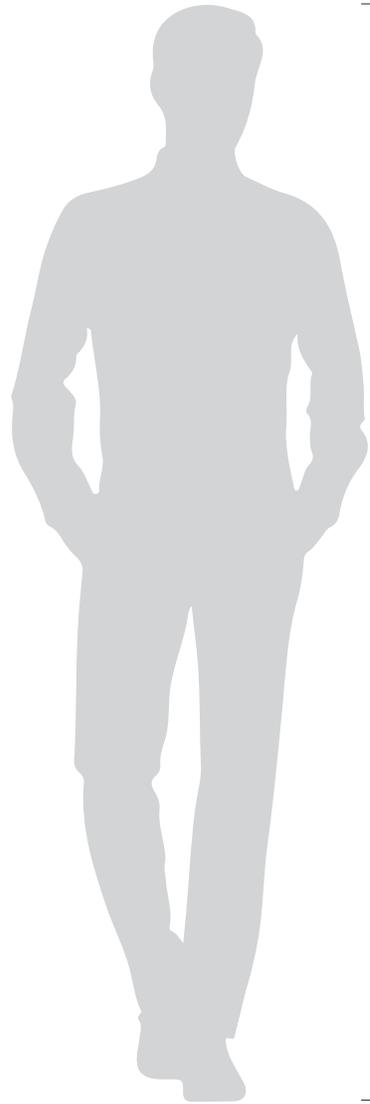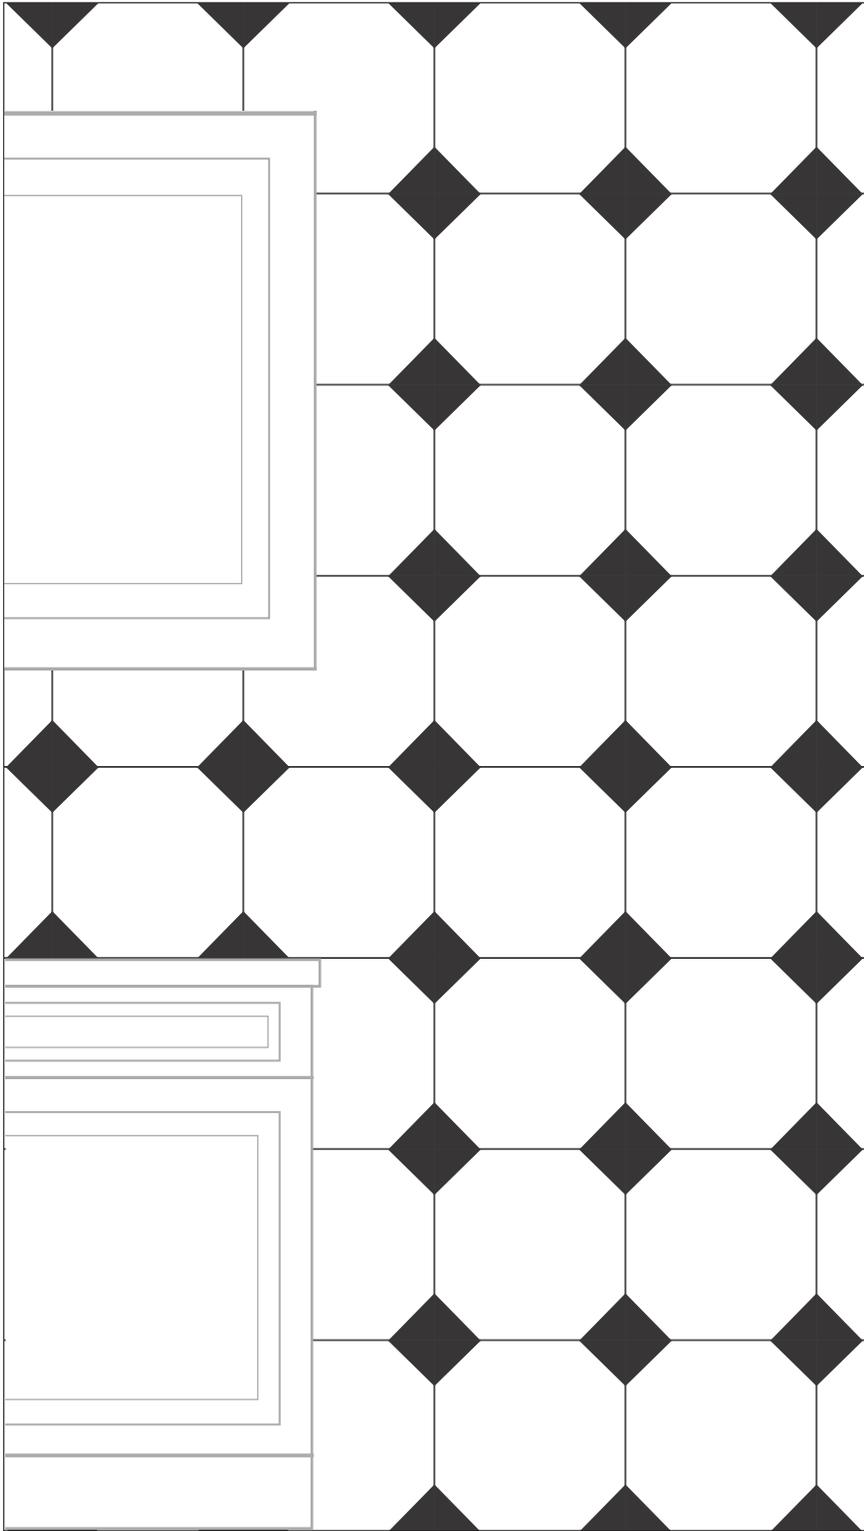

Notes:  
• 3" Dots (pictured in black) are sold separately.