

|                   |                       |              |
|-------------------|-----------------------|--------------|
| Material          | Ceramic               |              |
| Finish            | Crackle, Gloss, Matte |              |
| Thickness         | 3/8"                  |              |
| Cut and Fill Size | 3" x 6"               |              |
| Square Feet/Piece | 0.1250                |              |
| Mounting          | Loose                 |              |
| Available Colors  |                       |              |
| <u>Crackle</u>    | <u>Gloss</u>          | <u>Matte</u> |
| Frost             | Cape Cod              | Snow         |
| Stone             | Deep Sea              |              |
|                   | Gazebo                |              |
|                   | Oxford                |              |

| Usage |                            | Crackle | Gloss | Matte |
|-------|----------------------------|---------|-------|-------|
|       | Commercial Interior Wall   | ✓       | ✓     | ✓     |
|       | Residential Interior Wall  | ✓       | ✓     | ✓     |
|       | Residential Interior Floor |         | ✓     | ✓     |
|       | Shower Floor               |         | ✓     | ✓     |
|       | Shower Wall                | ✓       | ✓     | ✓     |

**Notes:**

- Crackle glazes should be sealed prior to and after grouting. Please note that crackle glazes are not appropriate for shower floors. Shower walls are okay.

**Material Data**



Color Variation

**Sealing**





Sealing only required for crackle glazes

**Cleaning and Maintenance**



Damp cloth and a gentle non-acidic soap

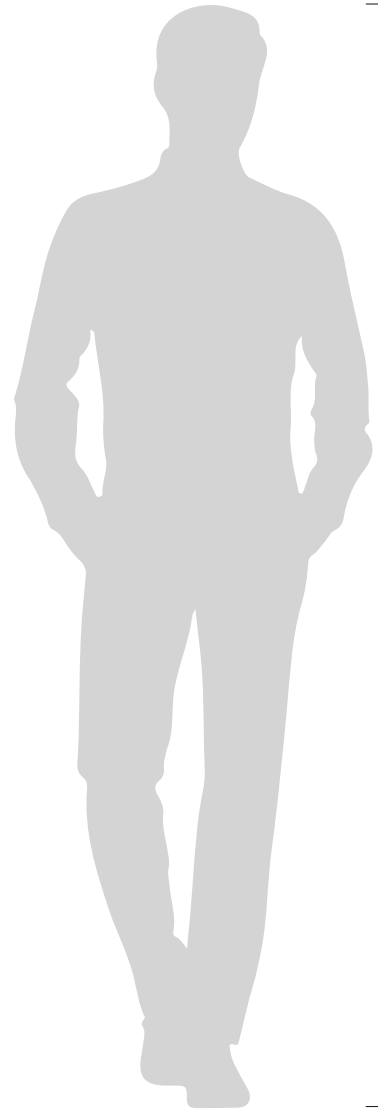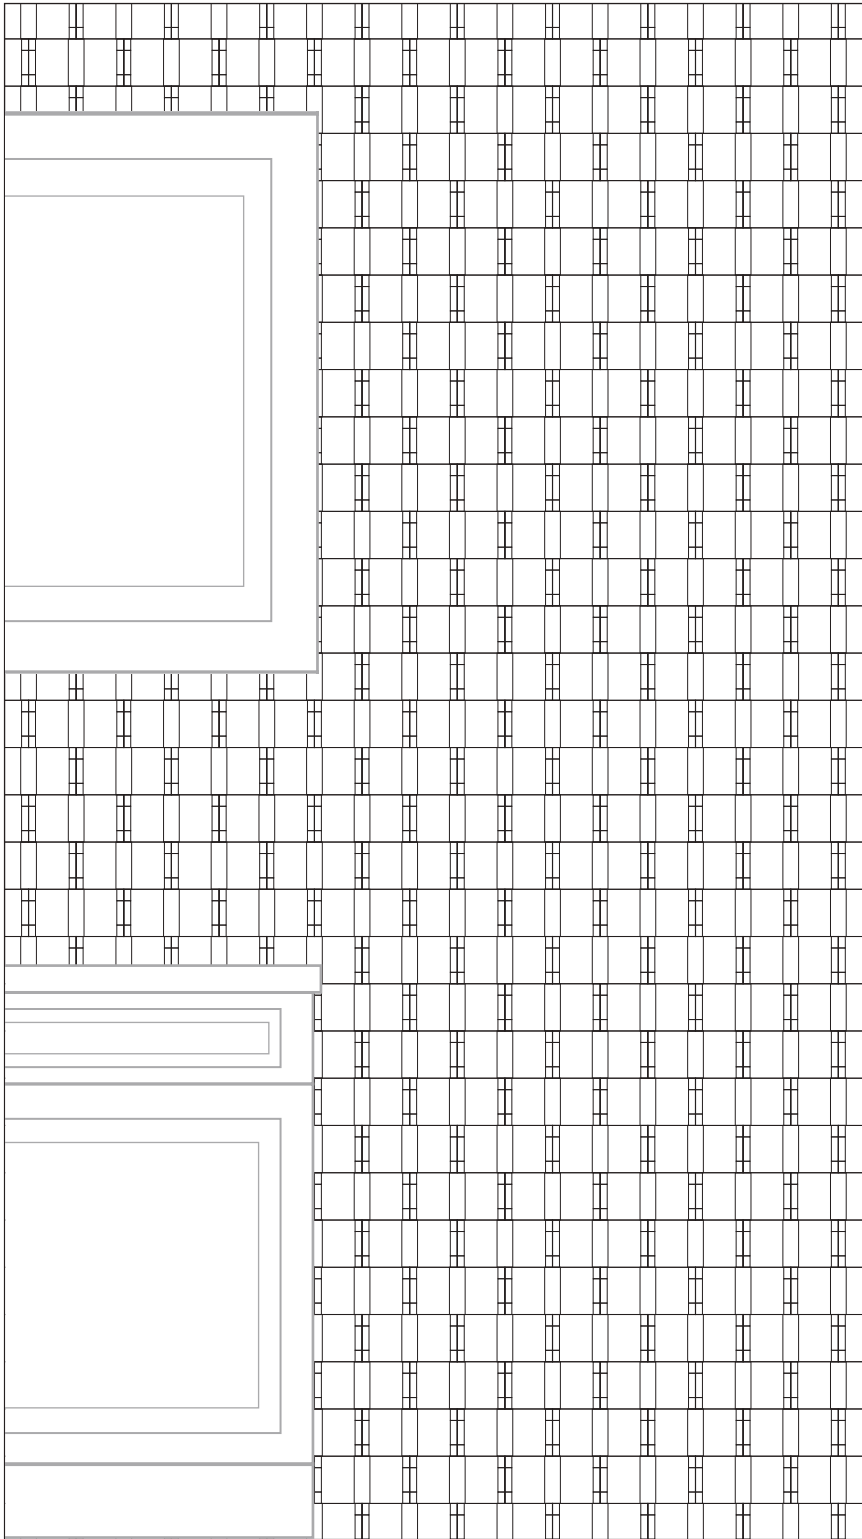

5' - 9"