


# Robert A.M. Stern™ Otto Crackle


DATE REVISED: FEBRUARY 2024

# WALKER ZANGER™

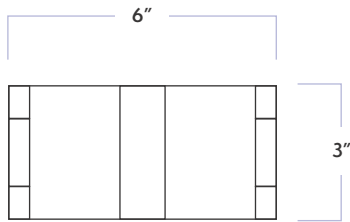

MATERIAL	Ceramic
FINISH	Crackle
THICKNESS	3/8"
SHEET SIZE	3" x 6"
COVERAGE SQFT/PIECE	0.125 SqFt
MOUNTING	Loose

AVAILABLE COLORS



Frost

## RECOMMENDED USAGES



Commercial Interior Wall





Residential Interior Wall

## MATERIAL DATA

LOW  
 V1 Color Variation

## MAINTENANCE

 Sealing is required

 Clean with a damp cloth and a gentle, non-acidic soap

## ADDITIONAL NOTES

Robert A.M. Stern™ Otto field tiles are also available in gloss and matte finishes. Shower wall, wet area, and any floor applications are NOT recommended for any product with a crackle glaze. Crackle glazes should be sealed prior to and after grouting. Contact your nearest sales account executive for more details on available products. For further questions/information about additional usages, please consult with your installer.

Robert A.M. Stern™

Otto Crackle

DATE REVISED: FEBRUARY 2024

