
Robert A.M. Stern[™] Wave Crackle

DATE REVISED: FEBRUARY 2024

W A L K E R[™] Z A N G E R



MATERIAL	Ceramic
FINISH	Crackle
THICKNESS	3/8″
SHEET SIZE	3″ x 6″
COVERAGE SQFT/PIECE	0.125 SqFt
MOUNTING	Loose
AVAILABLE COLORS	
Frost	
MATERIAL DATA	
IOW	

RECOMMENDED USAGES



Commercial Interior Wall



Residential Interior Wall

MAINTENANCE



Sealing is required

V1 Color Variation




Clean with a damp cloth and a gentle, non-acidic soap

ADDITIONAL NOTES

Robert A.M. Stern^{**} Wave field tiles are also available in gloss and matte finishes. Shower wall, wet area, and any floor applications are NOT recommended for any product with a crackle glaze. Crackle glazes should be sealed prior to and after grouting. Contact your nearest sales account executive for more details on available products. For further questions/information about additional usages, please consult with your installer.

Robert A.M. Stern[™] Wave Crackle

DATE REVISED: FEBRUARY 2024

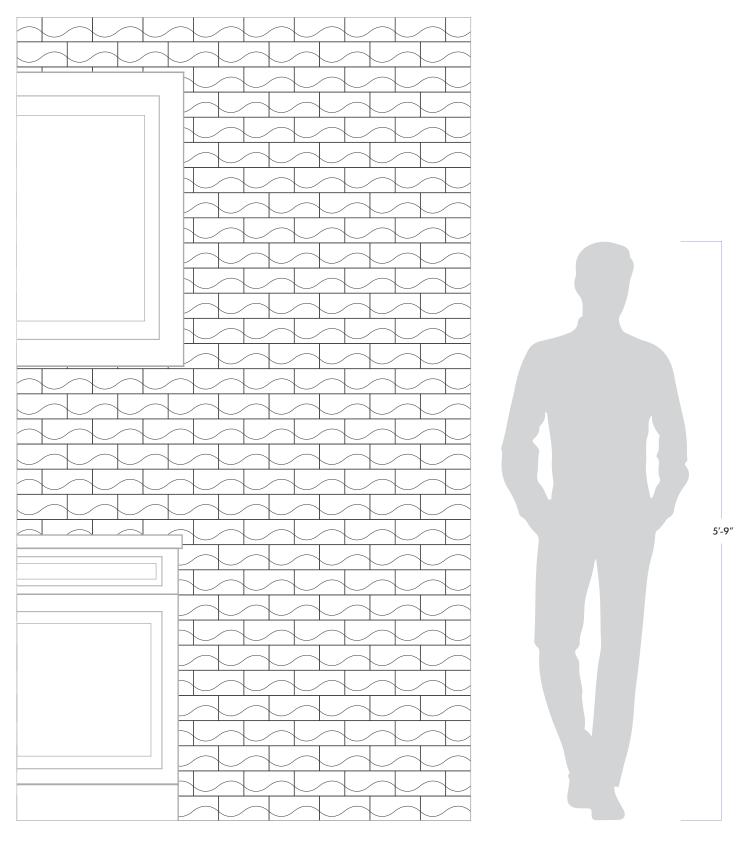

WALKER ZANGER[®]