



# Studio Moderne™ Ambassador

DATE REVISED: FEBRUARY 2024

# WALKER ZANGER™

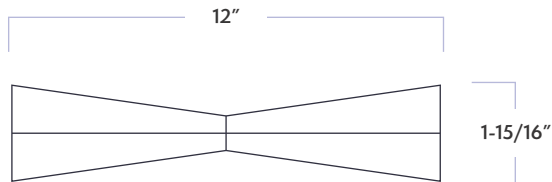

MATERIAL	Ceramic
FINISH	Crackle
THICKNESS	5/8"
SHEET SIZE	1-15/16" x 12"
COVERAGE SQFT/PIECE	0.1631 SqFt
MOUNTING	Loose

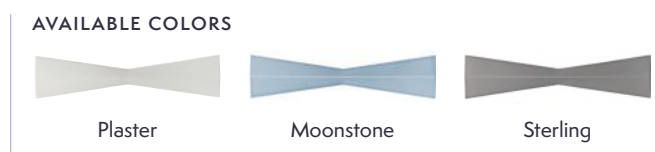

## RECOMMENDED USAGES



Commercial Interior Wall




Residential Interior Wall

## MATERIAL DATA



## MAINTENANCE





## ADDITIONAL NOTES

Shower wall, wet area, and any floor applications are NOT recommended for any product with a crackle glaze. Crackle glazes should be sealed prior to and after grouting. Contact your nearest sales account executive for more details on available products. For further questions/information about additional usages, please consult with your installer.

Studio Moderne™  
Ambassador

DATE REVISED: FEBRUARY 2024

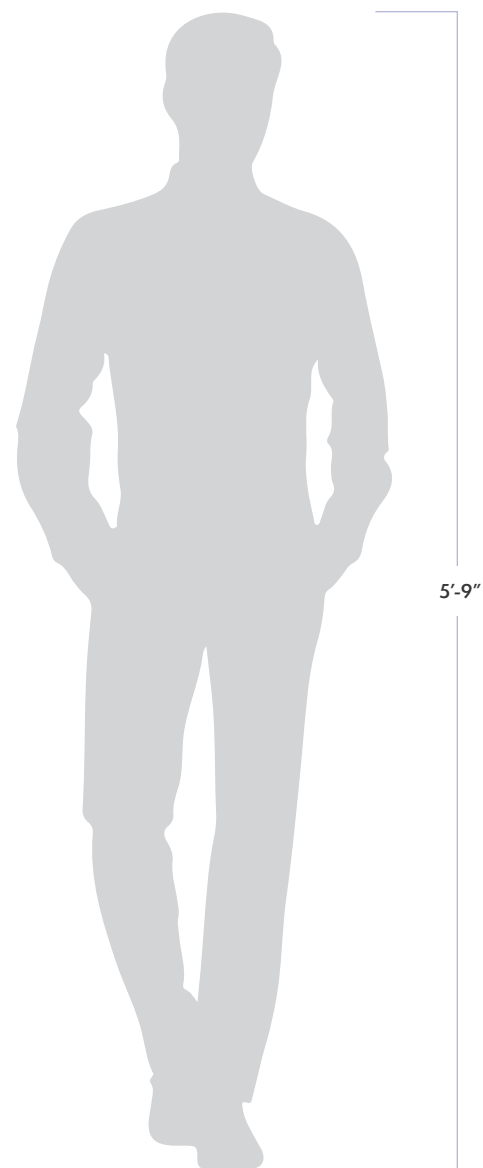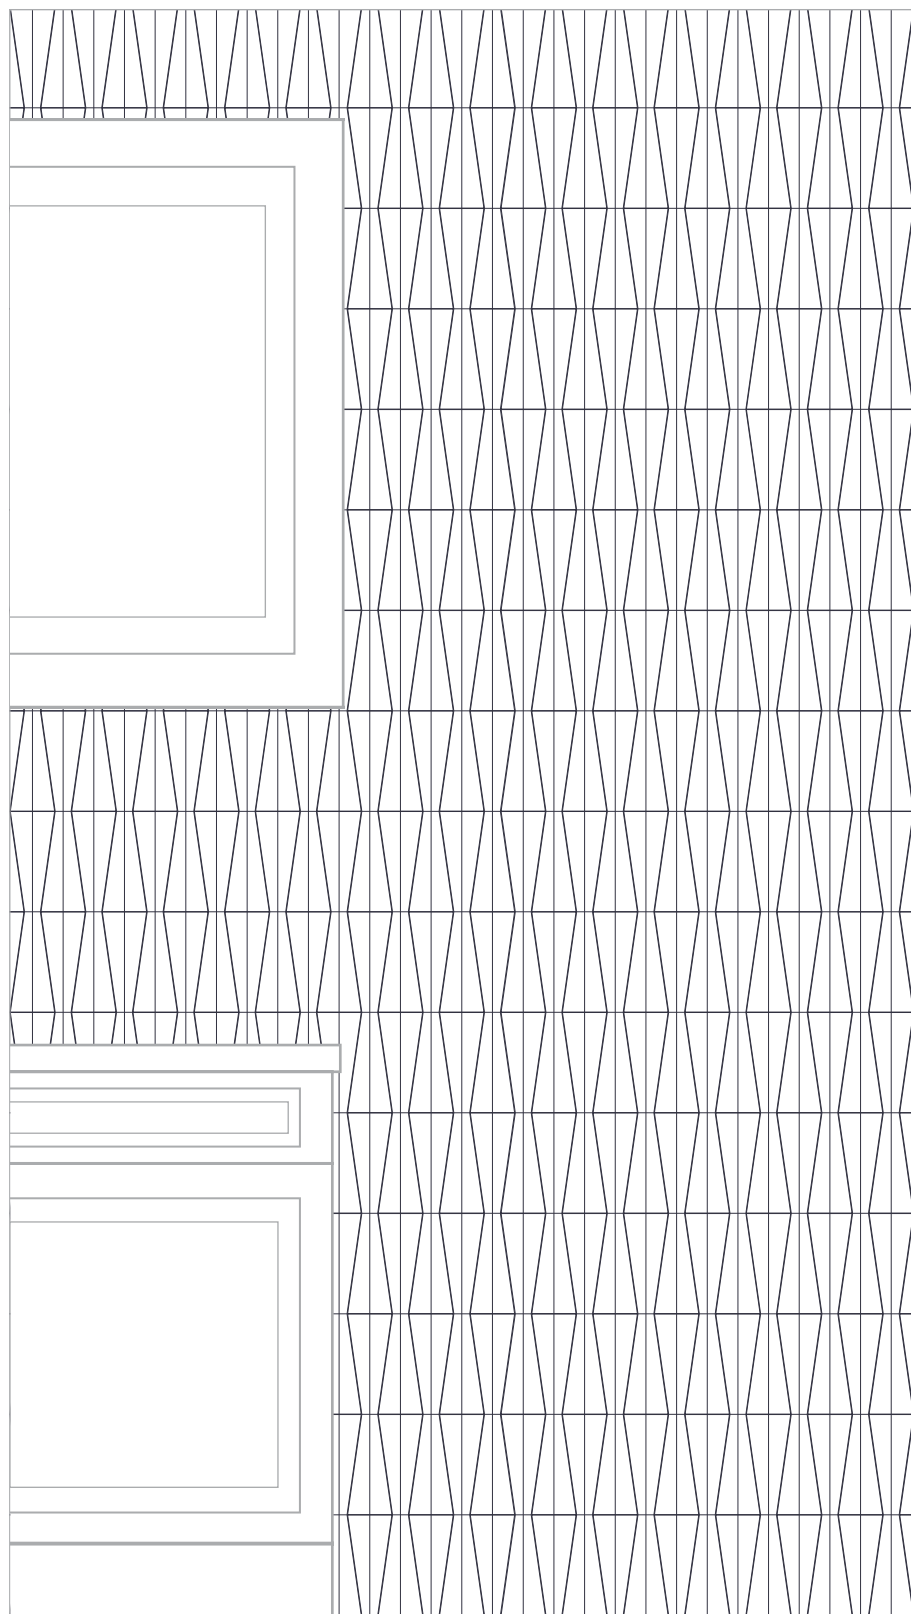

WALKER ZANGER™