


# Studio Moderne™ Imperial

DATE REVISED: FEBRUARY 2024

# WALKER ZANGER™

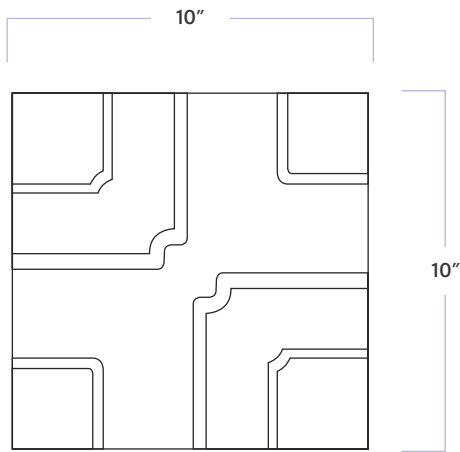

|                     |           |
|---------------------|-----------|
| MATERIAL            | Ceramic   |
| FINISH              | Crackle   |
| THICKNESS           | 5/8"      |
| SHEET SIZE          | 10" x 10" |
| COVERAGE SQFT/PIECE | 0.69 SqFt |
| MOUNTING            | Loose     |

#### AVAILABLE COLORS



Ecu

#### RECOMMENDED USAGES



Commercial Interior Wall



Residential Interior Wall

#### MATERIAL DATA



V1 Color Variation

#### MAINTENANCE



Sealing is required prior to grouting



Clean with a damp cloth and a gentle, non-acidic soap

#### ADDITIONAL NOTES

Shower wall, wet area, and any floor applications are NOT recommended for any product with a crackle glaze. Crackle glazes should be sealed prior to and after grouting. Contact your nearest sales account executive for more details on available products. For further questions/information about additional usages, please consult with your installer.

Studio Moderne™

# Imperial

DATE REVISED: FEBRUARY 2024

