


# Tatami

## 3" x 12" Field

DATE REVISED: DECEMBER 2023

WALKER  
ZANGER™

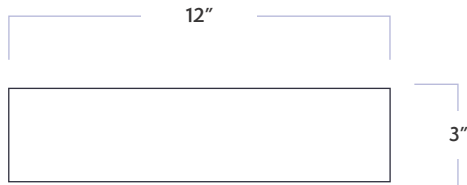

MATERIAL	Natural Stone
FINISH	Textured
THICKNESS	3/8"
SHEET SIZE	3" x 12"
COVERAGE SQFT/PIECE	0.25 SqFt
MOUNTING	Loose
DCOF	>0.42

#### AVAILABLE COLORS



Pearl

#### RECOMMENDED USAGES



- |  |  |
|--|--|
|  Commercial Exterior Wall   |  Commercial Interior Wall   |
|  Commercial Exterior Floor  |  Commercial Interior Floor  |
|  Residential Exterior Wall  |  Residential Interior Wall  |
|  Residential Exterior Floor |  Residential Interior Floor |
|  Fireplace Surround         |  Shower Wall                |
|  Shower Floor*              |  Steam Shower Wall          |

#### MATERIAL DATA



V2 Color Variation

#### MAINTENANCE

-  Sealing is required
-  Clean with a damp cloth and a gentle, non-acidic soap

#### ADDITIONAL NOTES

For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. Tatami 3"x12" Field tiles feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

**Tatami**  
**3" x 12" Field**

DATE REVISED: DECEMBER 2023

