




Material	Stone
Finish	Honed/Polished
Thickness	3/8"
Cut and Fill Size	11-1/2" x 11-1/8"
Square Feet/Piece	0.8929
Mounting	Mesh
Available Colors	
<u>Honed</u>	<u>Polished</u>
Calacata/Café Bruno	Noir
Calacata/Seagrass	

Usage	Calacata/ Café Bruno	Calacata/ Seagrass	Noir
Commercial Exterior Floor		✓	✓
Commercial Interior Floor	✓	✓	✓
Commercial Exterior Wall		✓	✓
Commercial Interior Wall	✓	✓	✓
Residential Exterior Floor		✓	✓
Residential Interior Floor	✓	✓	✓
Residential Exterior Wall	✓	✓	✓
Residential Interior Wall	✓	✓	✓
Shower Wall	✓	✓	✓

Material Data	Calacata/ Café Bruno	Calacata/ Seagrass	Noir
V1 Color Variation			✓
V3 Color Variation	✓		
V4 Color Variation		✓	
Sealing			
Sealing is required prior to grouting			
Cleaning and Maintenance			
Protect from harsh abrasive cleaners and tools			

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- If used for shower floors, must include waterproof membrane on substrate and 12 inches up adjacent walls prior to installation.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiquated stones", and light-colored marbles.
- Likely identified with dry seam, pits, fossils, and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

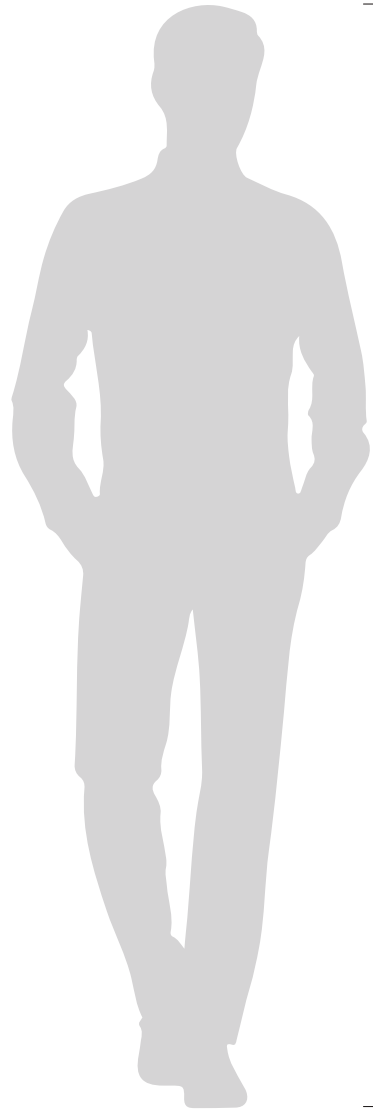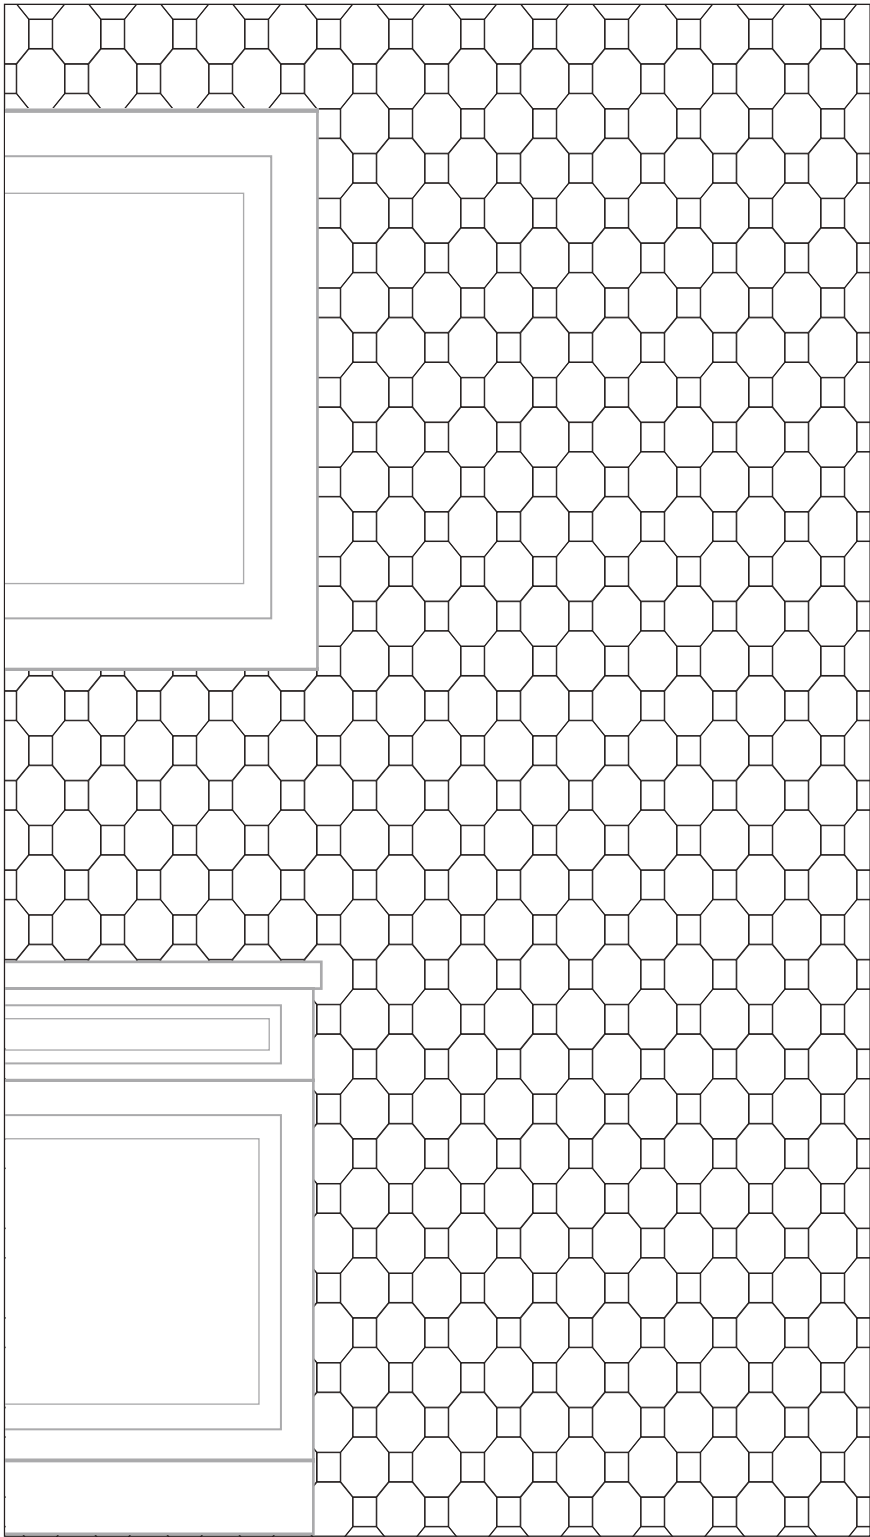

5' - 9"