







MATERIAL	Ceramic
FINISH	Crackle/Matte/Gloss
THICKNESS	3/8"
SHEET SIZE	3" x 6"
COVERAGE SQFT/PIECE	0.1250 SqFt
MOUNTING	Loose

#### AVAILABLE COLORS\*

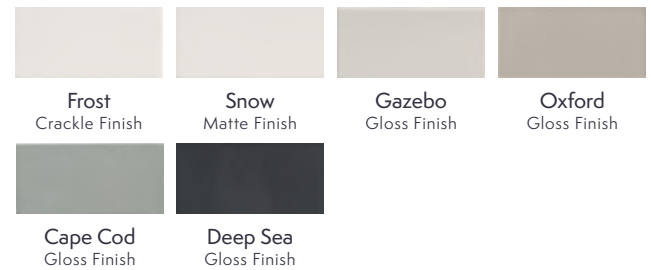



#### RECOMMENDED USAGES

-  Commercial Interior Wall
-  Residential Interior Wall
-  Residential Interior Floor\*
-  Shower Floor\*
-  Shower Wall

#### MATERIAL DATA



#### MAINTENANCE

-  Sealing only required for crackle glazes
-  Clean with a damp cloth and a gentle, non-acidic soap



#### ADDITIONAL NOTES

Shower wall and shower floor applications are NOT recommended for Frost Crackle. Crackle glazes should always be sealed prior to and after grouting. For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements.

Robert A.M. Stern™

3" x 6" Field

DATE REVISED: JUNE 2023

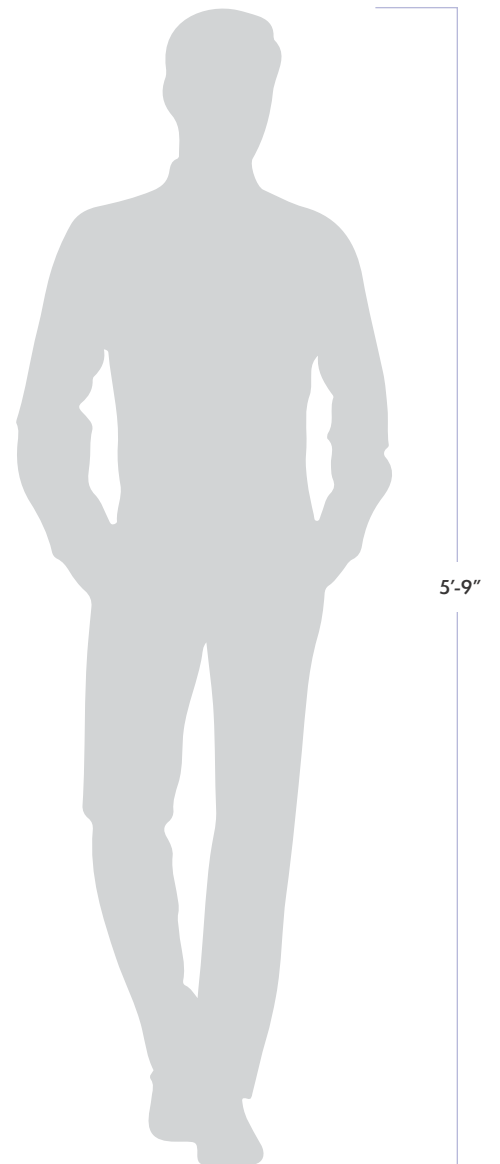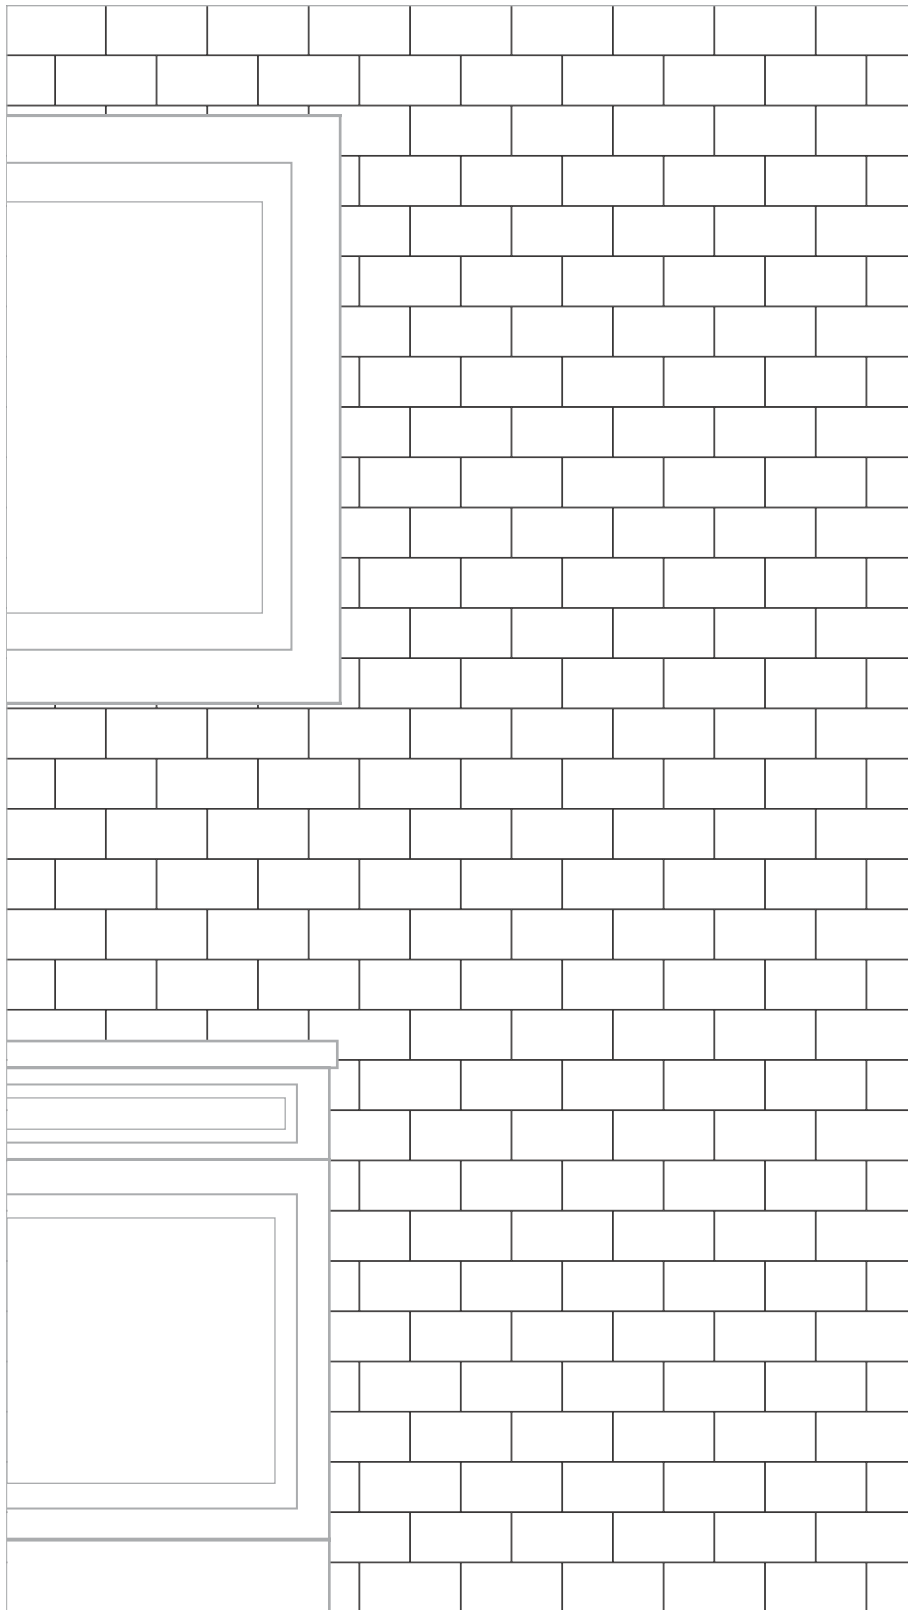

WALKER ZANGER™