


MATERIAL	Ceramic
FINISH	Crackle/Matte/Gloss
THICKNESS	3/8"
SHEET SIZE	3" x 6"
COVERAGE SQFT/PIECE	0.1250 SqFt
MOUNTING	Loose

AVAILABLE COLORS*

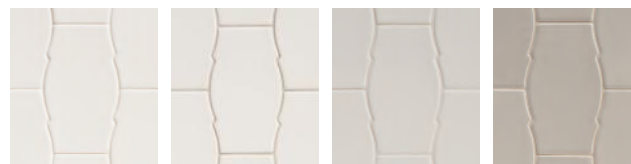


Frost
Crackle Finish

Snow
Matte Finish

Gazebo
Gloss Finish

Oxford
Gloss Finish



Cape Cod
Gloss Finish

Deep Sea
Gloss Finish

RECOMMENDED USAGES



Commercial Interior Wall



Residential Interior Wall



Residential Interior Floor*



Shower Floor*



Shower Wall

MATERIAL DATA



V1 Color Variation

MAINTENANCE



Sealing only required for crackle glazes





Clean with a damp cloth and a gentle, non-acidic soap

ADDITIONAL NOTES

Shower wall and shower floor applications are NOT recommended for Frost Crackle. Crackle glazes should always be sealed prior to and after grouting. For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements.

Robert A.M. Stern™
Ovolo

DATE REVISED: JUNE 2023

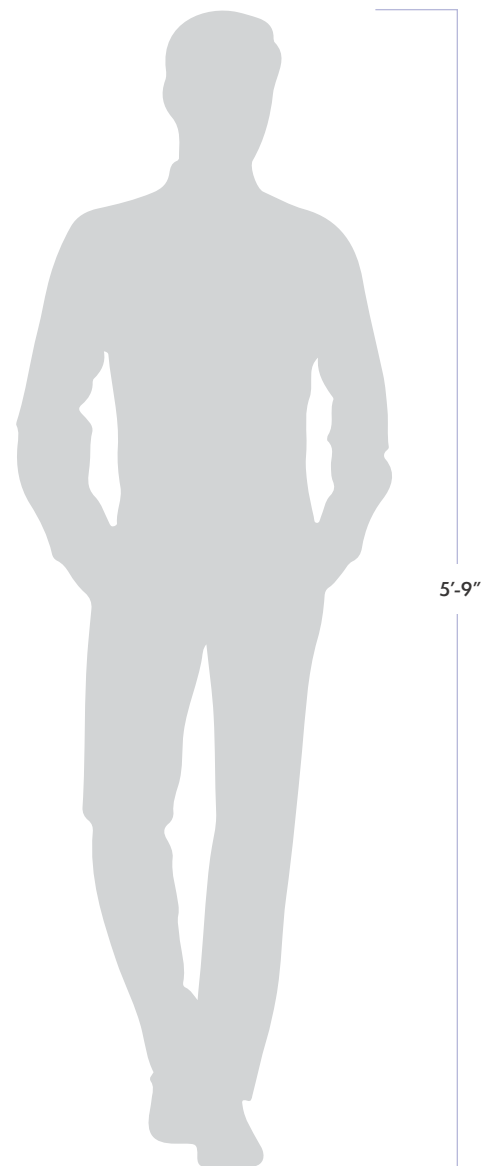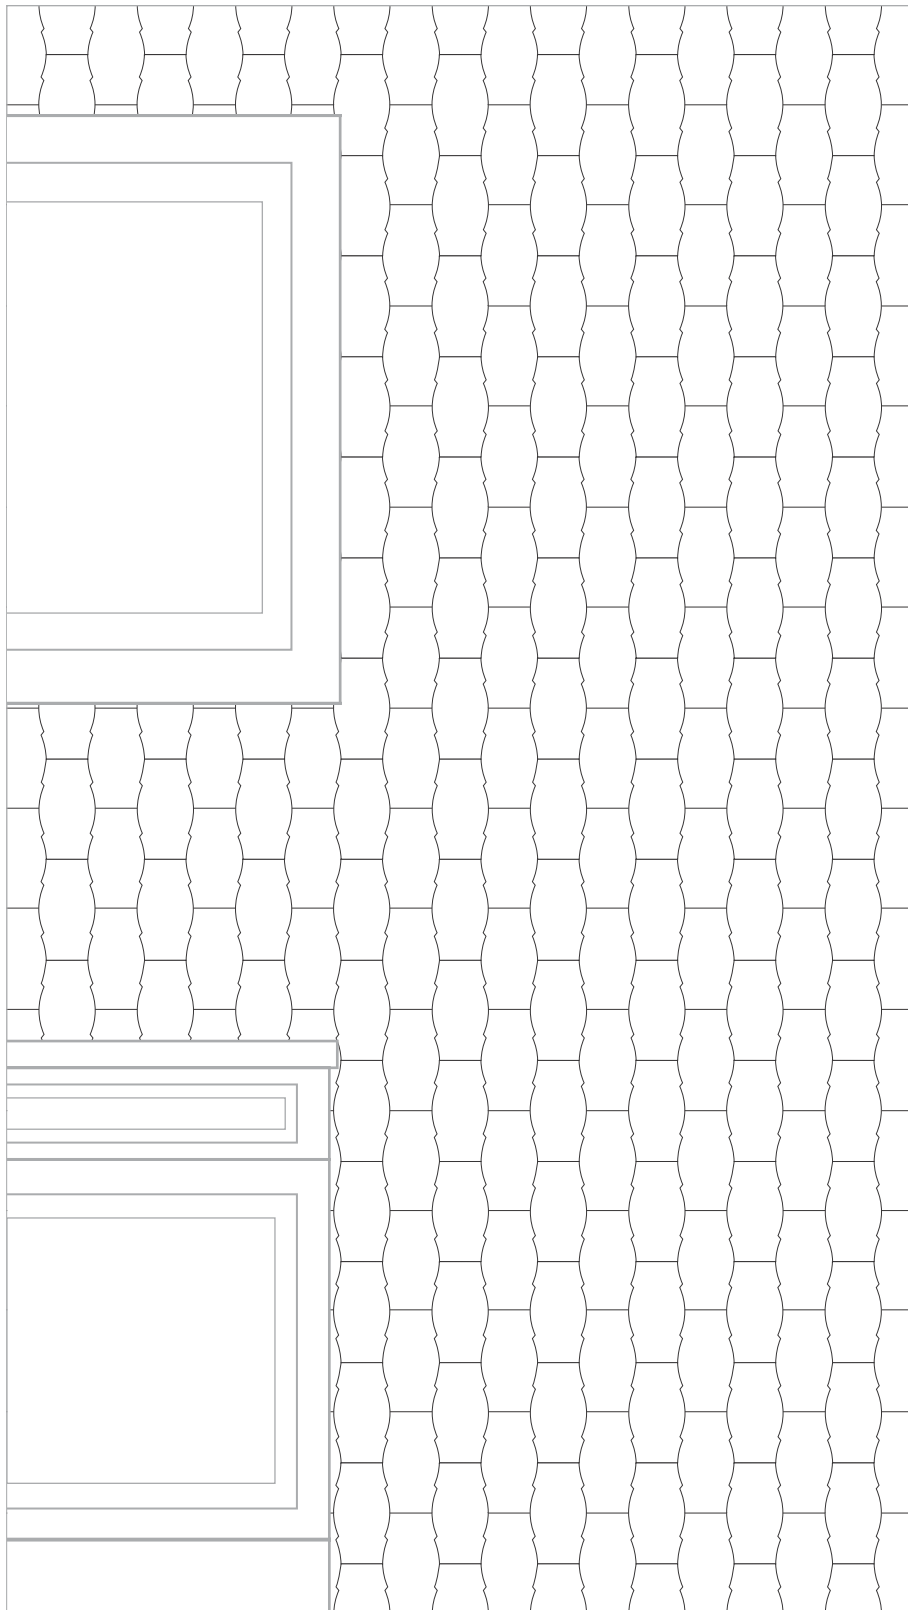

WALKER ZANGER™