


# Accent Bleu

## Candy Dot Mosaic


DATE REVISED: APRIL 2024

# WALKER ZANGER

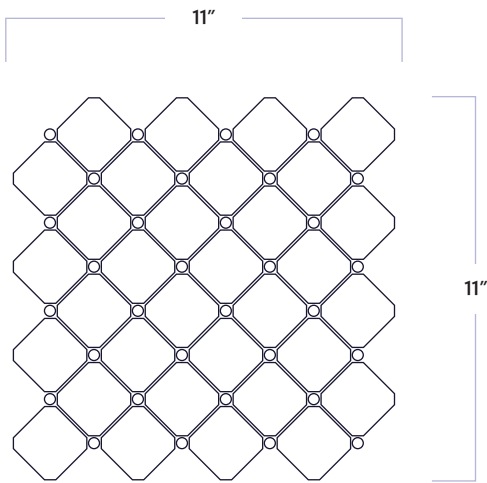

|                     |               |
|---------------------|---------------|
| MATERIAL            | Natural Stone |
| FINISH              | Polished      |
| THICKNESS           | 3/8"          |
| SHEET SIZE          | 11" x 11"     |
| COVERAGE SQFT/PIECE | 0.846 SqFt    |
| MOUNTING            | Mesh          |

#### AVAILABLE COLORS



Thassos/Blue Celeste/  
Azul Macauba

#### RECOMMENDED USAGES



Commercial Interior Wall



Commercial Interior Floor



Residential Interior Wall



Residential Interior Floor



Fireplace Surround



Shower Wall



Shower Floor\*

#### MATERIAL DATA



V3 Color Variation

#### MAINTENANCE



Sealing is required prior to grouting



Clean with a damp cloth and a gentle, non-acidic soap

#### ADDITIONAL NOTES

For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. Accent Bleu Candy Dot mosaic tiles feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

**Accent Bleu**  
**Candy Dot Mosaic**  
DATE REVISED: APRIL 2024

