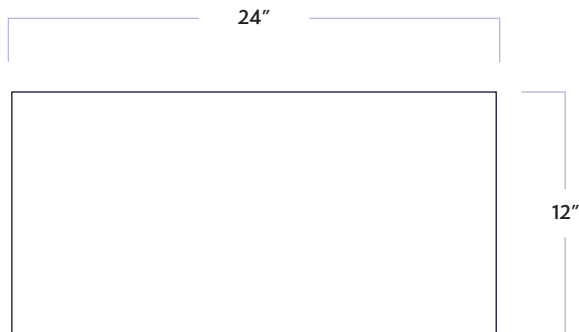




Tatami

12" x 24" Field

DATE REVISED: DECEMBER 2023

WALKER
ZANGER™



MATERIAL	Natural Stone	
FINISH	Textured	
THICKNESS	3/8"	
SHEET SIZE	12" x 24"	
COVERAGE SQFT/PIECE	2.00 SqFt	
MOUNTING	Loose	
AVAILABLE COLORS		
		
Bone	Pearl	Wheat



RECOMMENDED USAGES

- | | |
|--|--|
|  Commercial Exterior Wall |  Commercial Interior Wall |
|  Commercial Exterior Floor |  Commercial Interior Floor |
|  Residential Exterior Wall |  Residential Interior Wall |
|  Residential Exterior Floor |  Residential Interior Floor |
|  Fireplace Surround |  Shower Wall |
|  Shower Floor* |  Steam Shower Wall |

MATERIAL DATA



MAINTENANCE

-  Sealing is required
-  Clean with a damp cloth and a gentle, non-acidic soap

ADDITIONAL NOTES

For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. Tatami 12"x24" Field tiles feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

Tatami
12" x 24" Field

DATE REVISED: DECEMBER 2023

