


# Pietra Gris

## Capri Mosaic

DATE REVISED: SEPTEMBER 2023

# WALKER ZANGER™

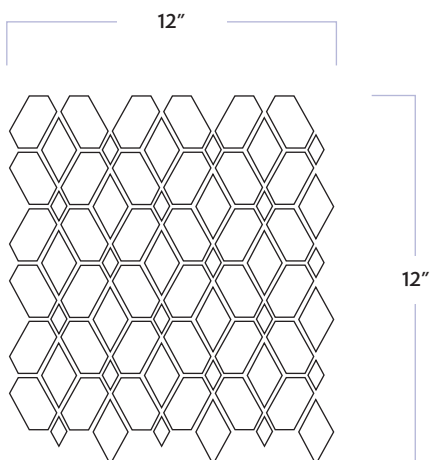

MATERIAL	Natural Stone
FINISH	Honed
THICKNESS	3/8"
SHEET SIZE	11-1/2" x 12-2/5"
COVERAGE SQFT/PIECE	0.9960 SqFt
MOUNTING	Mesh
DCOF	>0.42
AVAILABLE COLORS	 Light Grey



### RECOMMENDED USAGES

-  Commercial Exterior Wall
-  Commercial Interior Wall
-  Commercial Exterior Floor
-  Commercial Interior Floor
-  Residential Exterior Wall
-  Residential Interior Wall
-  Residential Exterior Floor
-  Residential Interior Floor
-  Fireplace Surround
-  Shower Wall
-  Shower Floor\*
-  Steam Shower Wall
-  Steam Shower Floor

### MATERIAL DATA

-  MEDIUM V3 Color Variation
-  Frost Resistant

### MAINTENANCE

-  Sealing is required
-  Clean with a damp cloth and a gentle, non-acidic soap

### ADDITIONAL NOTES

For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. Pietra Gris Capri Mosaic is a natural stone product. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

**Pietra Gris**  
**Capri Mosaic**

DATE REVISED: SEPTEMBER 2023

