
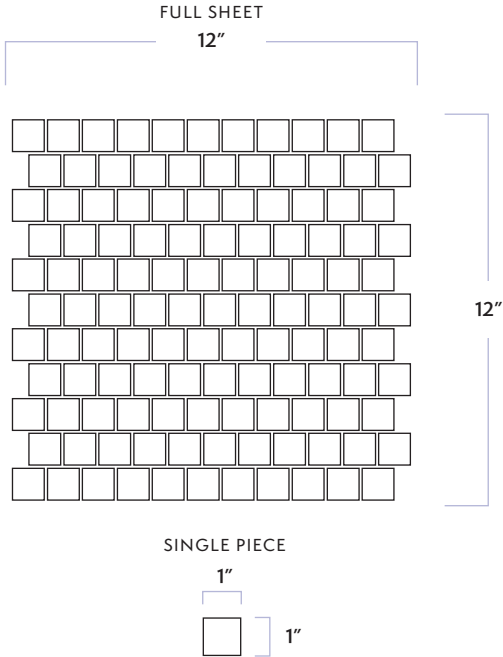


Shift Shuffle Mosaic

DATE REVISED: MARCH 2024

WALKER
ZANGER™



MATERIAL	Natural Stone		
FINISH	Multi-Textured		
THICKNESS	3/8"		
SHEET SIZE	11-9/10" x 11-9/10"		
COVERAGE SQFT/PIECE	0.9881 SqFt		
MOUNTING	Mesh		
AVAILABLE COLORS			
			
White	Cream	Grey	Charcoal

RECOMMENDED USAGES



Commercial
Exterior Wall



Commercial
Interior Wall



Commercial
Exterior Floor



Commercial
Interior Floor



Residential
Exterior Wall



Residential
Interior Wall



Residential
Exterior Floor



Residential
Interior Floor



Shower Wall



Shower Floor*



Steam Shower
Wall

MATERIAL DATA

MEDIUM



V3 Color Variation

HIGH



V4 Color Variation
(CHARCOAL ONLY)

MAINTENANCE



Sealing is required prior to grouting




Clean with a damp cloth and
a gentle, non-acidic soap

ADDITIONAL NOTES

Shower floor applications are NOT recommended for Cream colored mosaics. For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. All Shuffle Mosaics feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

Shift
Shuffle Mosaic

DATE REVISED: MARCH 2024

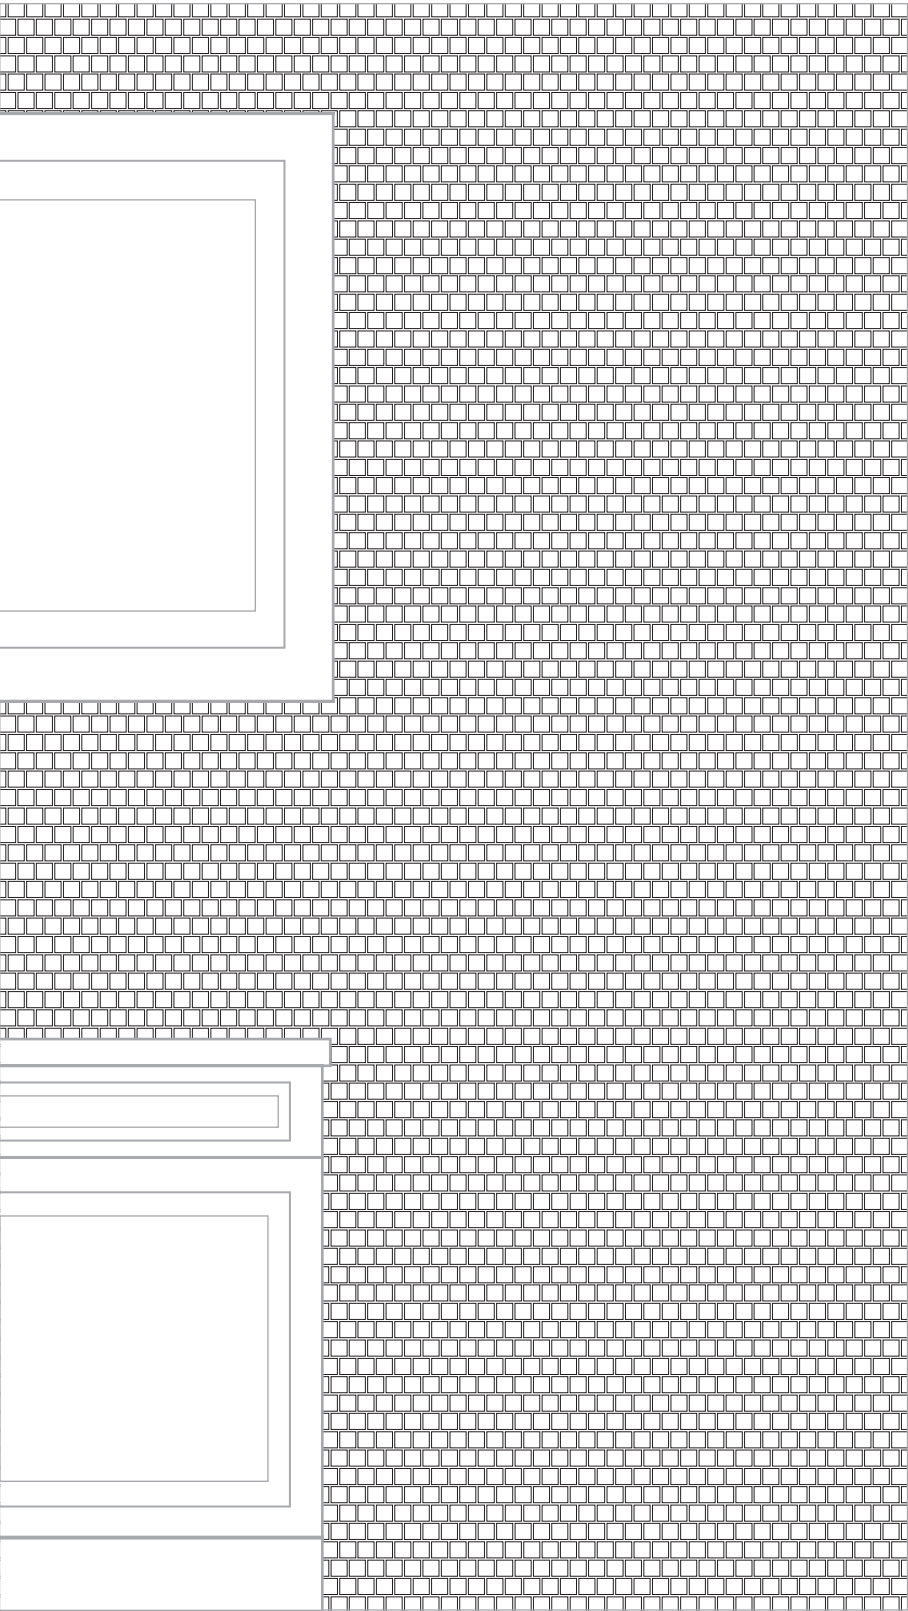

5'-9"