


# Shift

## Solitaire Mosaic

DATE REVISED: MARCH 2024

# WALKER ZANGER™

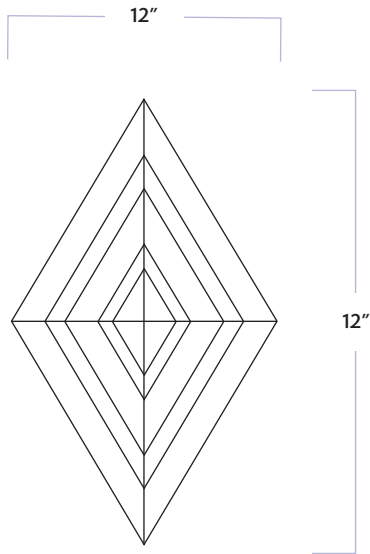

MATERIAL	Natural Stone
FINISH	Multi-Textured
THICKNESS	3/8"
SHEET SIZE	11-4/5" x 11-4/5"
COVERAGE SQFT/PIECE	0.968 SqFt
MOUNTING	Mesh

#### AVAILABLE COLORS



White/Grey



Charcoal

#### RECOMMENDED USAGES



Commercial Exterior Wall



Commercial Interior Wall



Commercial Exterior Floor



Commercial Interior Floor



Residential Exterior Wall



Residential Interior Wall



Residential Exterior Floor



Residential Interior Floor



Shower Wall



Shower Floor\*



Steam Shower Wall

#### MATERIAL DATA

MEDIUM



V3 Color Variation

#### MAINTENANCE



Sealing is required prior to grouting



Clean with a damp cloth and a gentle, non-acidic soap

#### ADDITIONAL NOTES

Shower floor applications are NOT recommended for Cream colored mosaics. For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. All Solitaire Mosaics feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

**Shift**  
**Solitaire Mosaic**

DATE REVISED: MARCH 2024

