


Studio Moderne™ Stone Stacked Mosaic

DATE REVISED: MAY 2023

WALKER ZANGER™

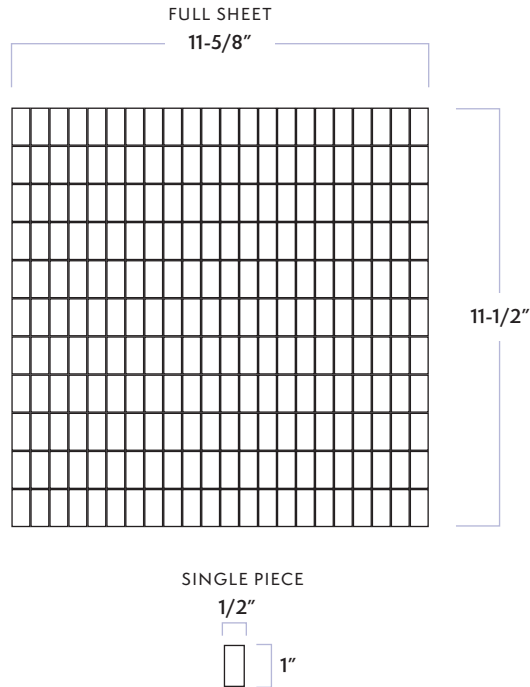

MATERIAL	Natural Stone
FINISH	Honed/Polished
THICKNESS	3/8"
SHEET SIZE	11-5/8" x 11-1/2"
COVERAGE SQFT/PIECE	0.9259 SqFt
MOUNTING	Mesh

AVAILABLE COLORS



RECOMMENDED USAGES

- | | |
|----------------------------|----------------------------|
| Commercial Exterior Wall | Commercial Interior Wall |
| Commercial Exterior Floor | Commercial Interior Floor |
| Residential Exterior Wall | Residential Interior Wall |
| Residential Exterior Floor | Residential Interior Floor |
| Shower Wall* | Shower Floor* |

MATERIAL DATA

- V1 Color Variation
- V4 Color Variation (CALACATTA ONLY)

MAINTENANCE

- Sealing is required prior to grouting
- Clean with a damp cloth and a gentle, non-acidic soap

ADDITIONAL NOTES

Shower wall and shower floor applications are NOT recommended for Gascogne Blue. For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. All stacked mosaics feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

Studio Moderne™ Stone Stacked Mosaic

DATE REVISED: MAY 2023

