


# Studio Moderne™ Stone Wilshire


DATE REVISED: MAY 2023

# WALKER ZANGER™

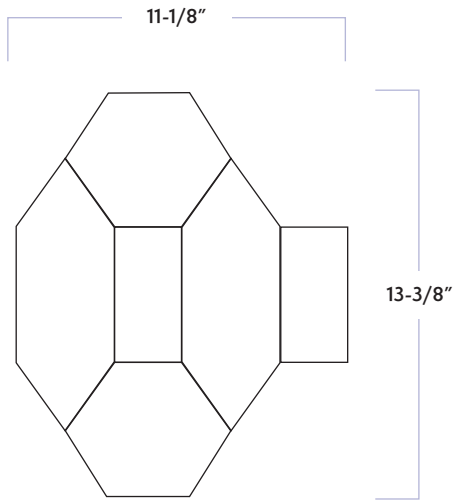

|                     |                   |
|---------------------|-------------------|
| MATERIAL            | Natural Stone     |
| FINISH              | Honed             |
| THICKNESS           | 3/8"              |
| SHEET SIZE          | 11-1/8" x 13-3/8" |
| COVERAGE SQFT/PIECE | 0.6803 SqFt       |
| MOUNTING            | Mesh              |

#### AVAILABLE COLORS



Calacatta



Bianco Bello



Gascogne Blue

#### RECOMMENDED USAGES



Commercial  
Exterior Wall



Commercial  
Interior Wall



Commercial  
Exterior Floor



Commercial  
Interior Floor



Residential  
Exterior Wall



Residential  
Interior Wall



Residential  
Exterior Floor



Residential  
Interior Floor

#### MATERIAL DATA



V1 Color Variation (CALACATTA ONLY)



V4 Color Variation  
(BIANCO BELLO & GASCOGNE BLUE)

#### MAINTENANCE



Sealing is required prior to grouting



Clean with a damp cloth and  
a gentle, non-acidic soap

#### ADDITIONAL NOTES

All Wilshire tiles feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

**Studio Moderne™ Stone**  
**Wilshire**

DATE REVISED: MAY 2023

