


# Tribeca™

## Penny Round Mosaic


DATE REVISED: JULY 2023

# WALKER ZANGER™

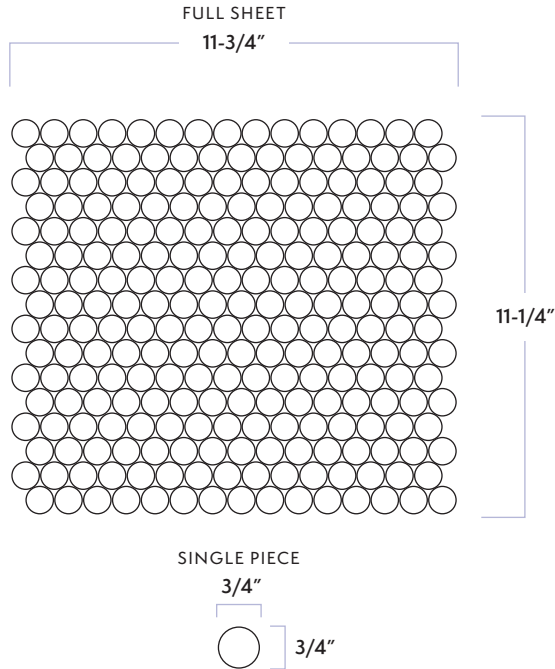

MATERIAL	Natural Stone
FINISH	Honed
THICKNESS	3/8"
SHEET SIZE	11-3/4" x 11-1/4"
COVERAGE SQFT/PIECE	0.84 SqFt
MOUNTING	Mesh

### AVAILABLE COLORS

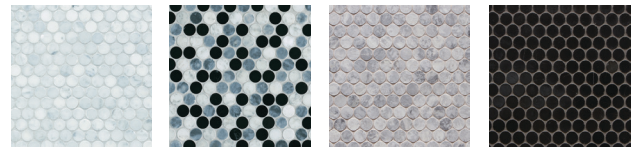

Classic White   Loft Blend   Flatiron Grey   Basic Black

### RECOMMENDED USAGES

- Commercial Exterior Wall
- Commercial Interior Wall
- Commercial Interior Floor
- Residential Exterior Wall
- Residential Interior Wall
- Residential Interior Floor
- Shower Wall
- Shower Floor\*
- Steam Shower Wall
- Steam Shower Floor

### MATERIAL DATA

LOW



V1 Color Variation

MEDIUM



V4 Color Variation (CLASSIC WHITE ONLY)

### MAINTENANCE

- Sealing is required prior to grouting
- Clean with a damp cloth and a gentle, non-acidic soap

### ADDITIONAL NOTES

For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. All penny round mosaics feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. White thin-set or mortar is required for the following: light limestone, tumbled stones, "antiquated stones" and light-colored marbles. It is possible that dry seams, pits, fossils, and glass veins are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling the voids may be a necessary maintenance procedure. For further questions/information about additional usages, please consult with your installer.

**Tribeca™**  
**Penny Round Mosaic**

DATE REVISED: JULY 2023

